



DuROCK PUCC-ROCK Mineral Fibre/Wool EIFS Insulation Board

PRODUCT SPECIFICATION


DuROCK PUCC-ROCK insulation is non-combustible mineral fibre/wool manufactured by Rockwool, compliant with CAN/ULC-S702.1 and CAN/ULC-S114. Thermal resistance value is RSI 0.70 per 25 mm (R 4.0 per inch).

PUCC-ROCK insulation incorporates a geometrically defined drainage cavity (GDDC) on the backside that is 10 mm deep and 37% open.


PUCC-ROCK insulation includes an integral alkali-resistant fibreglass mesh on the front side.

PUCC-ROCK insulation is available in 51, 76, 102, 127, and 152 mm (2, 3, 4, 5, and 6 inch) thicknesses.

Refer to PUCSS NC system specification and details for further information.

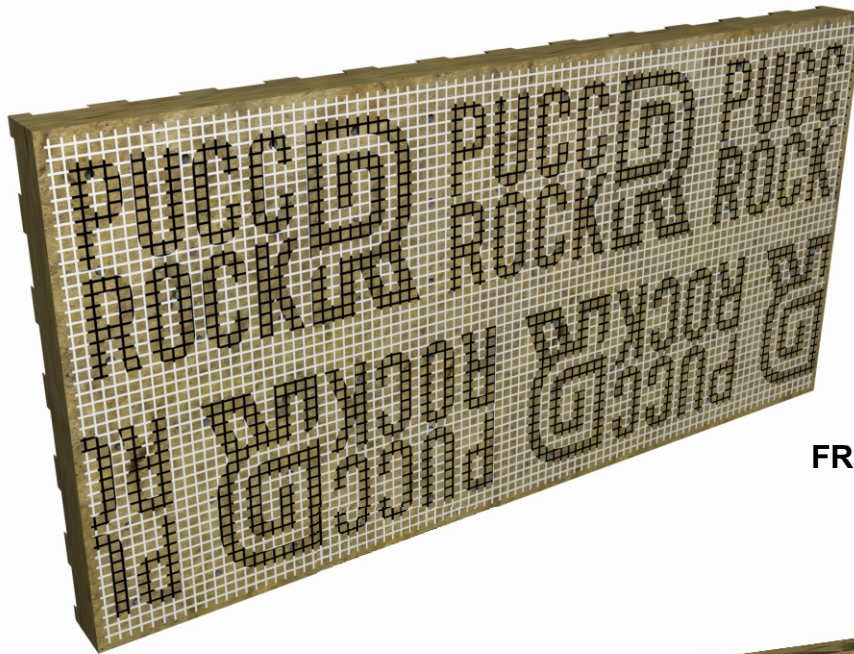

FRONT VIEW

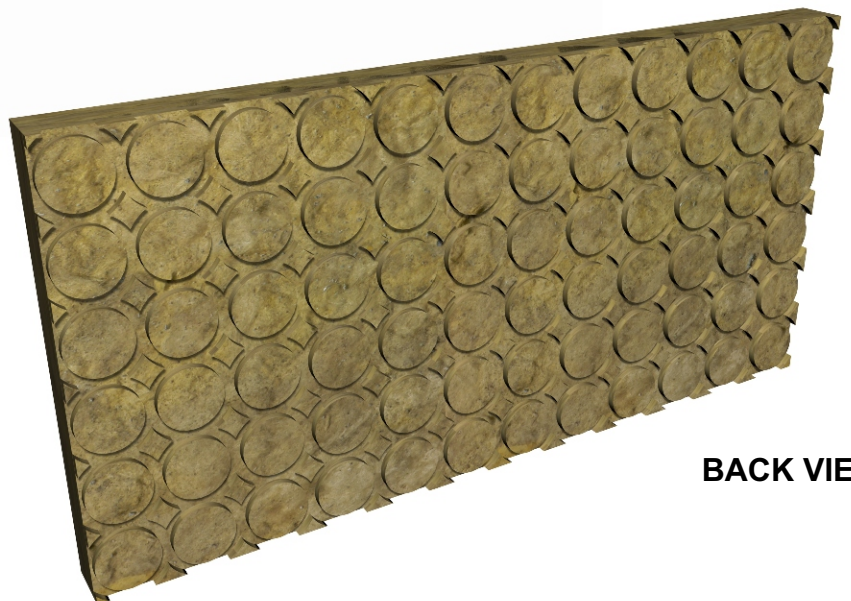

BACK VIEW