DuROCK PUCCS EIFS

Exterior Insulation Finish System for Existing Brick Buildings

PUCCS™
Pressure-Utilized Compartmented Cavity System

CCMC No. 12969-R

DuROCK

ARCHITECTURAL FINISHING SYSTEMS

*DuROCK One-Step Ready-Mix may be required to fill mortar joints or to fill in unevenness in the surface of brick

DuROCK Moisture Barrier

DuROCK Moisture Barrier/Adhesive

PUCCS EPS Insulation with 10mm Geometrically Defined Drainage Cavity (GDDC)

DuROCK Reinforcing Mesh embedded in Prep Coat

DuROCK Mechanical Fasteners may be required to supplement the adhesive over painted or coated brick

DuROCK Finish Coat

DuROCK Base Primer (optional)

DuROCK Uni-Track drainage track

Wrap insulation edge with reinforcing mesh, terminate base coat at drainage track

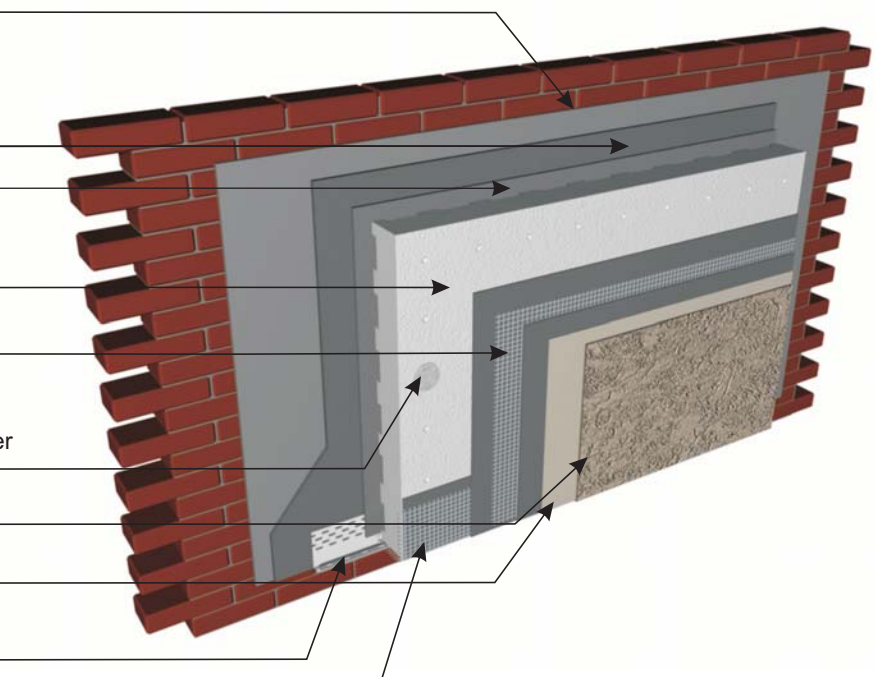

STANDARD WALL SECTION

In accordance with EIFS standards, substrates are to be free of paint, etc. And substrates are to be true in all directions to within 6mm over 2400 mm(0,25 in over 100 in).Substrates not in compliance with EIFS standards are to be assessed by a qualified Professional in consultation with DuROCK.

Moisture drainage through 10mm Geometrically Defined Drainage Cavity (GDDC)

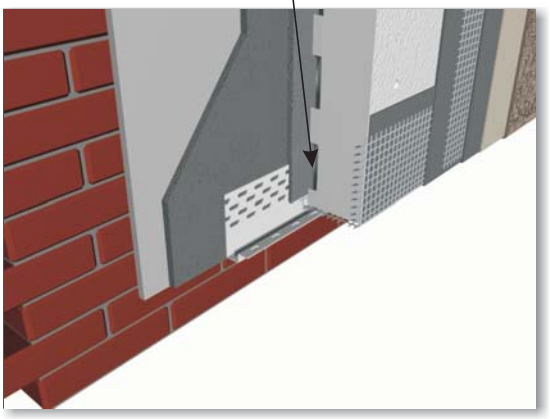

DuROCK
Alfacing International Limited
101 B-ROYTEC ROAD, WOODBRIDGE, ON. L4L 8A9
TEL: (905) 856-0133, FAX: (905) 856-9654
www.durock.com
ARCHITECTURAL FINISHING SYSTEMS

This detail complements the corresponding system specification and illustrates the system configuration for the depicted construction. Visit www.durock.com for the latest revisions and contact DuROCK for project-specific details to suit conditions other than those depicted. DuRock assumes no liability for the architecture, design, engineering, or workmanship of any project.

PUCCS-EBB
Last revise:
Issued: April 2021
COVER